



**HIGH  
RATE  
MAX<sup>XT</sup>**



# UPS12-100MRX

**Valve Regulated Lead Acid Battery**

**Designed for UPS Standby Power Applications**

## FEATURES AND BENEFITS


### APPLICATIONS

- Data Centers
- Network Operation Centers
- Industrial Process Control Facilities
- Internet Housing Sites
- Semiconductor Manufacturing
- Banks and Financial Markets
- Power Generation Plants
- Hospital and Testing Laboratories
- Emergency Response Center

- 10 year design life @ 25°C
- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance.
- 3 Year Warranty (refer Dynasty warranty card, 41-9027)
- Patented Long Life Alloy having the lowest calcium levels in the industry - minimizing grid growth, reducing gassing, and extending battery life
- Patented UL Recognized Flame-arresting vents in each cell for safety and long life.
- Designed with the same recombination, thermal runaway prevention, gassing and flame retardant characteristics of the Bellcore 4228 compliant Dynasty Telecom products.
- Flame retardant polypropylene case and cover compliant with UL94V-2
- Proprietary Fixed Orifice Plate Pasting technology applying active materials on both sides of the grid for consistent cell-to-cell performance, higher capacity and uniform grid protection.
- Thermally welded case-to-cover bond to eliminate leakage
- Can be operated in upright, side or end mounting orientation.
- Not restricted for air transport -Complies with IATA/ICAO Special Provisions A67.
- Not restricted for surface transport - Classified as non-hazardous material as related to DOT-CFR Title 49 parts171-189
- Not restricted for water transport - Classified as non-hazardous material per IMDG Amendment 27.

## Specifications

| Cells Per Unit | Voltage Per Unit | Weight  | Watts/Cell @ 15min | 1 Min Current to 1.75VPC | Short Circuit Current | Resistance    |
|----------------|------------------|---------|--------------------|--------------------------|-----------------------|---------------|
| 6              | 12.98V           | 10.7 Kg | 100                | 171 Amps                 | 1003 Amps             | 12.35 (mOhms) |

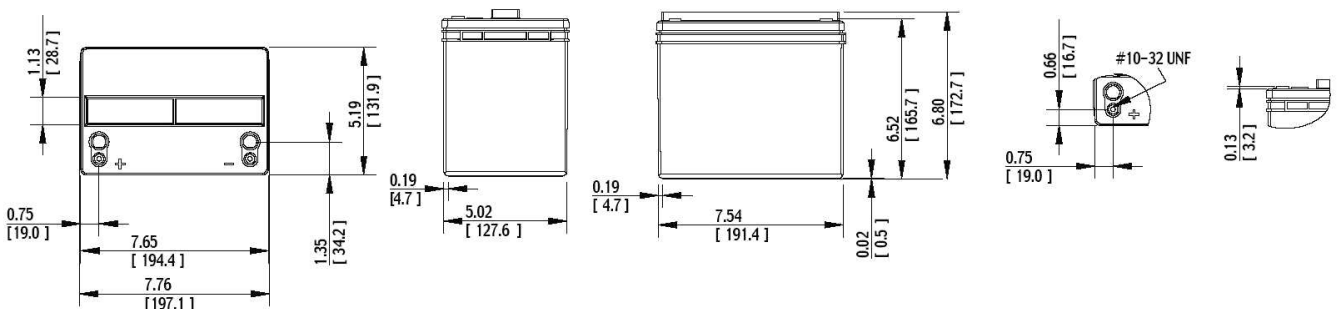

\*All dimensions in inches and (millimeters). All dimensions are for reference only. Contact a C&D Representative for complete dimensional information.

## Specifications

|  |  |
|--|--|
| <b>Operating Temperature Range with temperature compensation</b> | Discharge: -40° F (-40° C) to +160°F (71°C)<br>Charge: -10°F (-23°C) to +140°F (60°C)  |
| <b>Nominal Operating Temperature Range</b>                       | +74° F (23°C) to +80°F (27°C)  |
| <b>Recommended Maximum Charging Current Limit</b>                | C/5 amperes @ 20hr rate  |
| <b>Float Charging Voltage</b>                                    | 13.65 ± 0.15 VDC average per 12V unit  |
| <b>Maximum AC Ripple (Charger)</b>                               | 0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Max voltage allowed = 1.4% RMS (4% P-P) Max current allowed = C/20  |
| <b>Self Discharge</b>  | Battery can be stored up to 6 months at 77° F (25°C) before a freshening charge is required. Batteries stored at temperatures greater than 77°F (25°C) will require recharge sooner than batteries stored at lower temperatures. See C&D brochure 41-7272, Self-Discharge and Inventory Control for details. |
| <b>Equalize charge and cycle service voltage</b>                 | 14.40 to 14.80 VDC average per 12V unit @ 77° F (25°C)   |
| <b>Terminal</b>  | Threaded copper alloy insert terminal to accept #10-32 UNF bolt  |
| <b>Terminal Hardware Initial Torque</b>                          | 30 in.-lbs. (3.4 N-m)  |

### Constant Power Discharge Table - Watts Per Cell @ 25°C (77°F)

#### Operating Time to End Point Voltage

| EPV  | 5 min | 10 min | 15 min | 20 min | 25 min | 30 min | 45 min | 60 min | 90 min | 2 hr | 3 hr | 4 hr | 5 hr | 8 hr | 10 hr | 12 hr | 20 hr |
|------|-------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|------|------|-------|-------|-------|
| 1.85 | 142.5 | 105.3  | 86.4   | 72.7   | 63.6   | 57.0   | 44.2   | 36.9   | 27.4   | 22.2 | 15.9 | 12.6 | 10.5 | 7.2  | 5.9   | 5.0   | 3.2   |
| 1.80 | 157.1 | 117.1  | 95.2   | 79.3   | 68.8   | 61.3   | 47.0   | 39.0   | 28.6   | 22.9 | 16.5 | 13.0 | 10.9 | 7.4  | 6.1   | 5.2   | 3.3   |
| 1.75 | 165.8 | 126.4  | 99.5   | 82.8   | 71.8   | 63.9   | 48.6   | 40.0   | 29.0   | 23.1 | 16.6 | 13.2 | 11.0 | 7.5  | 6.2   | 5.3   | 3.4   |
| 1.70 | 172.2 | 131.0  | 103.3  | 85.5   | 73.7   | 65.4   | 49.4   | 40.5   | 29.3   | 23.3 | 16.7 | 13.3 | 11.1 | 7.5  | 6.2   | 5.3   | 3.4   |
| 1.67 | 176.1 | 133.3  | 105.7  | 87.1   | 74.9   | 66.3   | 49.9   | 40.8   | 29.4   | 23.4 | 16.8 | 13.3 | 11.1 | 7.5  | 6.2   | 5.3   | 3.4   |
| 1.65 | 178.8 | 135.8  | 107.3  | 88.2   | 75.7   | 66.9   | 50.2   | 41.0   | 29.6   | 23.4 | 16.8 | 13.3 | 11.1 | 7.6  | 6.2   | 5.3   | 3.4   |

### Constant Current Discharge Table - Amps @ 25°C (77°F)

#### Operating Time to End Point Voltage

| EPV  | 5 min | 10 min | 15 min | 30 min | 60 min | 90 min | 2 hr | 3 hr | 4 hr | 5 hr | 6 hr | 7 hr | 8 hr | 10 hr | 12 hr | 20 hr | 24 hr |
|------|-------|--------|--------|--------|--------|--------|------|------|------|------|------|------|------|-------|-------|-------|-------|
| 1.90 | 68.2  | 52.4   | 42.2   | 28.4   | 18.2   | 13.2   | 10.5 | 7.5  | 5.9  | 4.9  | 4.2  | 3.7  | 3.3  | 2.7   | 2.3   | 1.5   | 1.3   |
| 1.85 | 80.0  | 61.1   | 48.5   | 31.4   | 20.1   | 14.4   | 11.4 | 8.2  | 6.4  | 5.4  | 4.6  | 4.0  | 3.6  | 2.9   | 2.5   | 1.6   | 1.4   |
| 1.80 | 88.6  | 68.0   | 53.7   | 33.6   | 21.0   | 15.1   | 11.9 | 8.5  | 6.7  | 5.6  | 4.8  | 4.2  | 3.7  | 3.1   | 2.6   | 1.7   | 1.4   |
| 1.75 | 93.3  | 71.3   | 56.3   | 34.9   | 21.5   | 15.4   | 12.1 | 8.6  | 6.8  | 5.7  | 4.9  | 4.3  | 3.8  | 3.1   | 2.6   | 1.7   | 1.4   |

Note: Batteries to be mounted with 0.5 in. (1.25 cm) spacing minimum and free air ventilation. Specifications subject to change without notification.