



**HIGH
RATE
MAX^{XT}**



UPS12-600MRX

Valve Regulated Lead Acid Battery

Designed for UPS Standby Power Applications

FEATURES AND BENEFITS


APPLICATIONS

- Data Centers
- Network Operation Centers
- Industrial Process Control Facilities
- Internet Housing Sites
- Semiconductor Manufacturing
- Banks and Financial Markets
- Power Generation Plants
- Hospital and Testing Laboratories
- Emergency Response Center

- 10 year design life @ 25°C
- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance.
- 3 Year Warranty (refer Dynasty warranty card, 41-9027)
- Patented Long Life Alloy having the lowest calcium levels in the industry - minimizing grid growth, reducing gassing, and extending battery life
- Patented UL Recognized Flame-arresting vents in each cell for safety and long life.
- Designed with the same recombination, thermal runaway prevention, gassing and flame retardant characteristics of the Bellcore 4228 compliant Dynasty Telecom products.
- Flame retardant polypropylene case and cover compliant with UL94V-2
- Proprietary Fixed Orifice Plate Pasting technology applying active materials on both sides of the grid for consistent cell-to-cell performance, higher capacity and uniform grid protection.
- Thermally welded case-to-cover bond to eliminate leakage
- Can be operated in upright, side or end mounting orientation.
- Not restricted for air transport -Complies with IATA/ICAO Special Provisions A67.
- Not restricted for surface transport - Classified as non-hazardous material as related to DOT-CFR Title 49 parts171-189
- Not restricted for water transport - Classified as non-hazardous material per IMDG Amendment 27.

Specifications

Cells Per Unit	Voltage Per Unit	Weight	Watts/Cell @ 15min	1 Min Current to 1.75VPC	Short Circuit Current	Resistance
6	12.98V	49.4 Kg	600	828 Amps	3640 Amps	3.45 (mOhms)

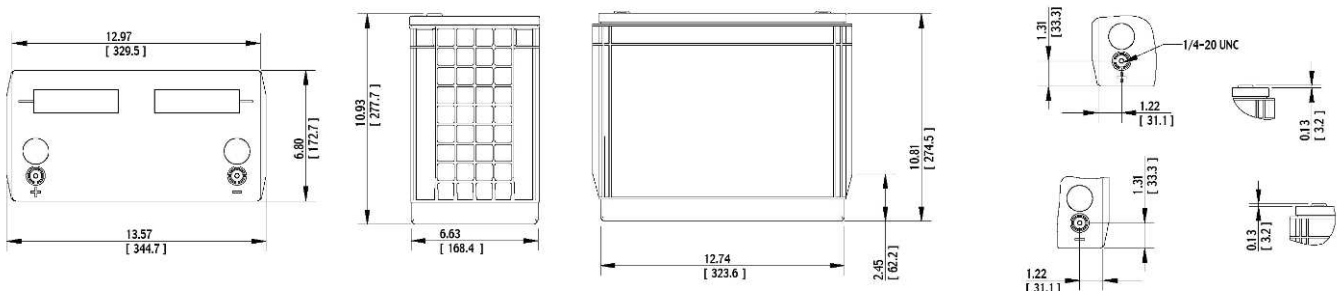

*All dimensions in inches and (millimeters). All dimensions are for reference only. Contact a C&D Representative for complete dimensional information.

Specifications

Operating Temperature Range with temperature compensation	Discharge: -40° F (-40° C) to +160°F (71°C) Charge: -10°F (-23°C) to +140°F (60°C)
Nominal Operating Temperature Range	+74° F (23°C) to +80°F (27°C)
Recommended Maximum Charging Current Limit	C/5 amperes @ 20hr rate
Float Charging Voltage	13.65 ± 0.15 VDC average per 12V unit
Maximum AC Ripple (Charger)	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Max voltage allowed = 1.4% RMS (4% P-P) Max current allowed = C/20
Self Discharge	Battery can be stored up to 6 months at 77° F (25°C) before a freshening charge is required. Batteries stored at temperatures greater than 77°F (25°C) will require recharge sooner than batteries stored at lower temperatures. See C&D brochure 41-7272, Self-Discharge and Inventory Control for details.
Equalize charge and cycle service voltage	14.40 to 14.80 VDC average per 12V unit @ 77° F (25°C)
Terminal	Threaded copper alloy insert terminal to accept 1/4-20 UNC bolt
Terminal Hardware Initial Torque	110 in.-lbs. (12.4 N-m)

Constant Power Discharge Table - Watts Per Cell @ 25°C (77°F)

Operating Time to End Point Voltage

EPV	5 min	10 min	15 min	20 min	25 min	30 min	45 min	60 min	90 min	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr	12 hr	20 hr
1.85	698.8	568.5	463.7	389.9	340.7	305.3	235.2	195.5	141.4	112.4	78.0	60.2	49.2	32.2	26.3	22.3	14.1
1.80	790.5	637.7	518.8	430.0	371.6	329.9	252.6	209.0	147.8	115.6	80.5	62.2	51.0	33.5	27.4	23.3	14.7
1.75	867.7	681.6	550.8	453.4	389.9	344.6	259.4	212.0	150.6	118.2	82.1	63.4	51.9	34.0	27.8	23.6	14.9
1.70	927.7	724.9	583.2	474.7	404.5	355.1	264.8	215.0	152.3	119.2	82.8	63.9	52.3	34.3	28.0	23.8	15.0
1.67	968.8	745.1	600.8	486.2	412.6	360.8	267.6	216.5	153.2	119.8	83.2	64.2	52.5	34.4	28.1	23.9	15.1
1.65	998.6	755.6	608.2	491.9	417.2	364.7	269.9	218.0	153.9	120.2	83.4	64.4	52.7	34.5	28.2	23.9	15.1

Constant Current Discharge Table - Amps @ 25°C (77°F)

Operating Time to End Point Voltage

EPV	5 min	10 min	15 min	30 min	60 min	90 min	2 hr	3 hr	4 hr	5 hr	6 hr	7 hr	8 hr	10 hr	12 hr	20 hr	24 hr
1.90	293.6	250.2	214.0	148.8	89.3	64.3	51.0	36.0	28.1	23.1	19.9	17.2	15.1	12.3	10.3	6.4	5.4
1.85	360.6	304.3	253.0	166.0	98.0	70.0	55.1	38.8	30.3	25.1	21.6	18.7	16.5	13.3	11.2	6.9	5.8
1.80	435.7	351.4	290.0	179.0	103.8	73.8	58.0	40.7	31.9	26.3	22.4	19.4	17.1	13.9	11.7	7.2	6.1
1.75	484.8	370.6	302.0	185.0	106.4	75.4	59.0	41.7	32.5	26.7	22.8	19.7	17.4	14.1	11.9	7.4	6.2

Note: Batteries to be mounted with 0.5 in. (1.25 cm) spacing minimum and free air ventilation. Specifications subject to change without notification.